

## 1.3 Megapixel WDR HD Vandal-proof IR Network In-ceiling Dome Camera



### Features

---

- 1/3" 1.3Mp Aptina CMOS
- H.264/MJPEG & dual-stream encoding
- Max 25/30fps@ 1.3M(1280×960)/720p
- Lens: 2.8~12mm/F1.4, IR LEDs: 20m
- WDR, 3DNR, D&N(ICR), Auto Iris, Micro SD card
- K10, IP65, AC24V/DC12V, PoE
- Material: Metal

## Technical Specifications


<b>Model</b>		<b>P-13WVIRDC</b>
<b>Camera</b>		
Image Sensor	1/3" 1.3Megapixel Aptina CMOS	
Effective Pixels	1280(H)x960(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto/Manual 1/4~1/10000	
Min. Illumination	0.1lux/F1.4(color),0.005Lux/F1.4(B/W),0Lux(IR on)	
S/N Ratio	>50dB	
Video Output	1 channel BNC(1.0Vp-p, 75?)	
<b>Camera Features</b>		
Max. IR LEDs Length	20m	
Day/Night	Auto(ICR)/Color/B/W	
Backlight Compensation	Off/BLC/HLC/WDR(128dB)	
White Balance	AUTO	
Gain Control	Auto/Manual	
Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
<b>Lens</b>		
Focal Length	2.8~12mm	
Max Aperture	F1.4	
Focus Control	Manual	
Angle of View	H: 92°(Wide)~27.2°(Tele)	
Lens Type	Manual/Auto Iris (DC)	
Mount Type	Board-in Type	
<b>Video</b>		
Compression	H.264 / MJPEG	
Resolution	1.3M(1280×960) /720P(1280×720)/ D1(704×480) / CIF(352×240) /	
Frame Rate	Main Stream	1.3M/720P(1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 12288Kbps	
<b>Audio</b>		
Compression	G.711a / G.711u (64kbps)/ PCM(128kbps)	
Interface	1/1 channel In/Out	
<b>Network</b>		
Ethernet	RJ-45 (10/100Base-T)	
Wi-Fi	N/A	
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF	ONVIF Profile S	
Max. User Access	10 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	

continued next page

## Technical Specifications

Model	P-13WVIRDC
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD, Max 32GB
RS485	N/A
Alarm	1/1 channel In/Out
PIR Sensor Range	N/A
<b>General</b>	
Power Supply	DC12V/AC24V, PoE(802.3af)
Power Consumption	<5W(IR on)
Working Environment	-10°C~+60°C, 10%~90%
Ingress Protection	IP65
Vandal Resistance	IK10
Dimensions	φ 146x139.5mm
Weight	1.4kg

## Dimensions (mm)

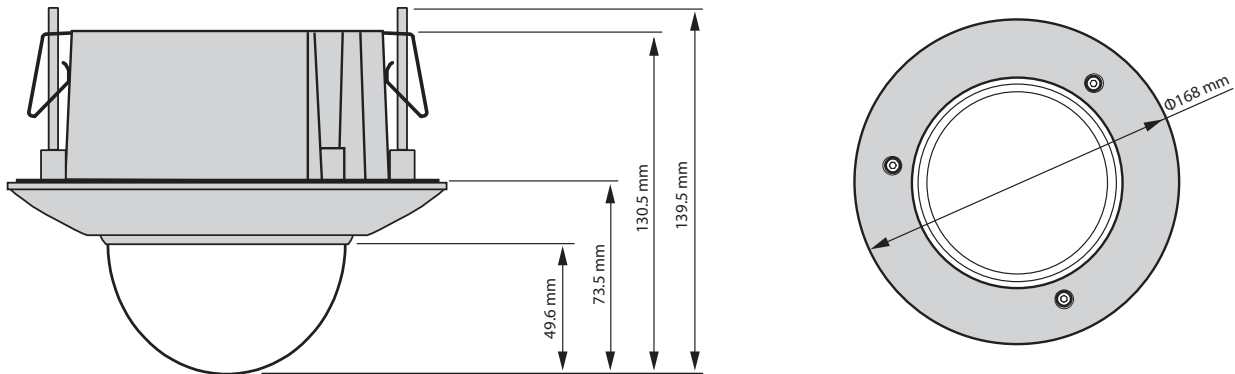

### **PRD International, Inc.**

20 Industrial Drive, Middletown, NY 10941  
855-9CAMERA • (855-922-6372)

*When You Need Video Evidence Instantly*